

**Standard:**

- Comply with ANSI/EIA RS-310-D IEC297-2 DIN41494;PART1 DIN41494;PART7, ETSI standard

Feature:

- Exquisite design with precise dimension and craftsmanship
- Toughened glass door with popular gray color, vented front door border and rear door
- Adjustable feet and heavy duty castors are available simultaneously
- Cable entry on the top cover and bottom panel with adjustable sizes
- Optional installation of plinth to enable cabinets fixation, under-base cable entry/ventilation;
- Efficient and reliable cabinet connection by baying kit
- Removable side panels to ease maintain
- Around 1/3 assembled original volume when flat pack.

Material:

- SPCC cold rolled steel
Thickness: mounting profile 2.0mm mounting angle 1.5mm, others 1.2mm


Surface finish:

- Degreasing, pickling, phosphoric, powder coated

Loading capacity:

- Static loading: 800KG

Main Dimension:

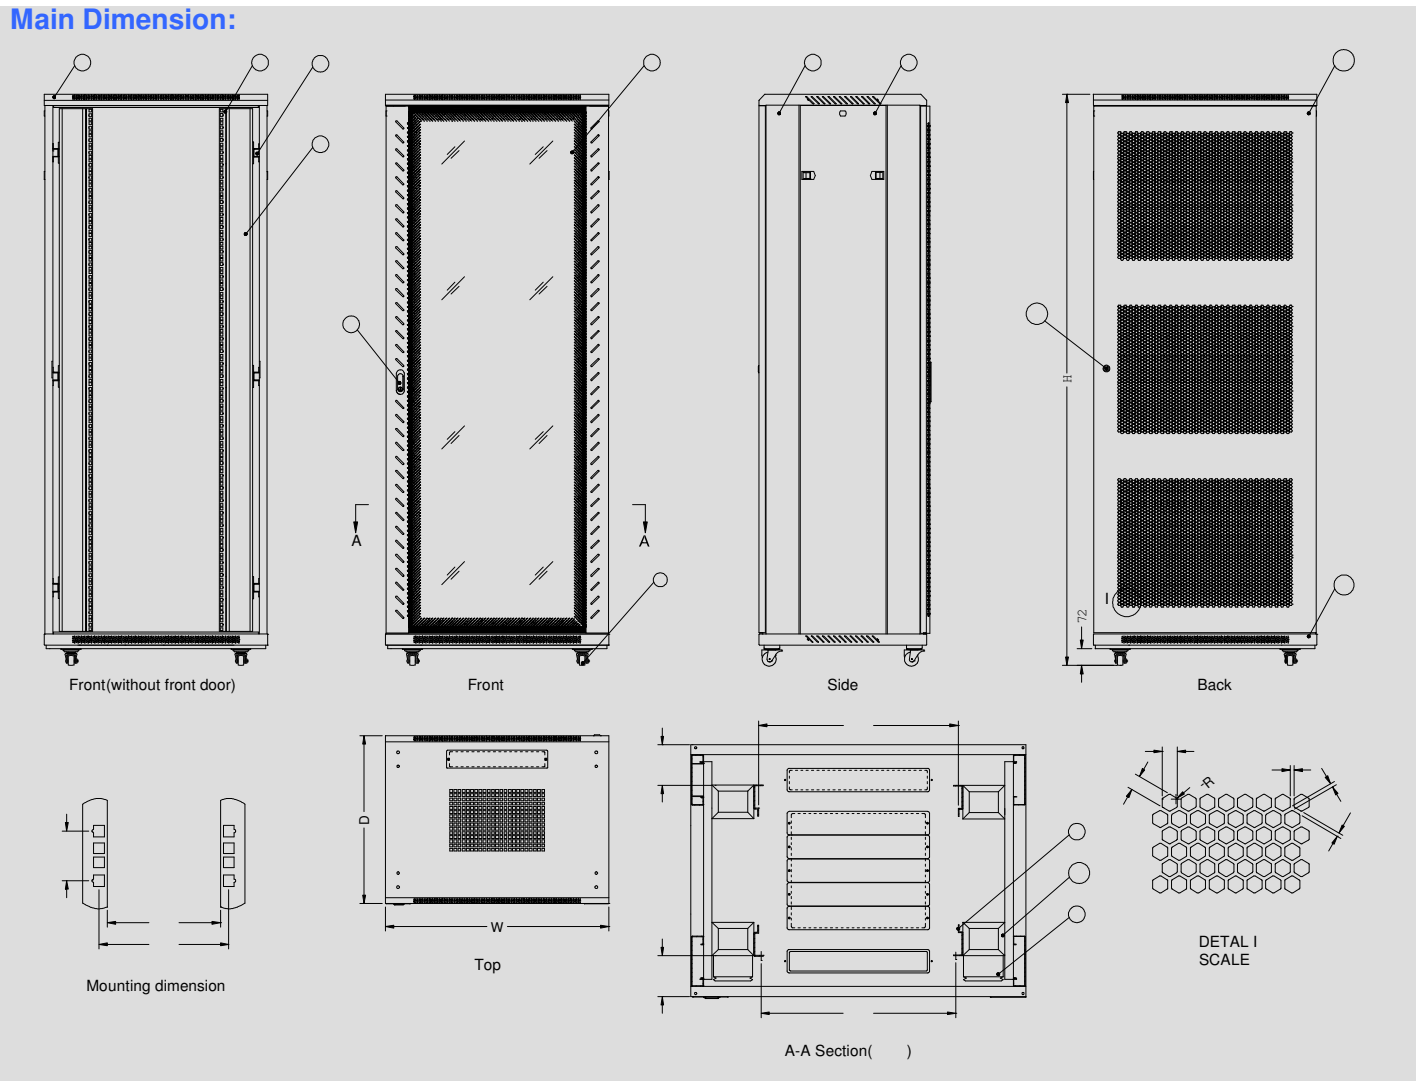

Main parts

S/N	Specification	Quantity	Unit	Material	Surface Finish	Remark
1	Top cover	1	Piece	SPCC cold rolled steel t1.2	Powder coated	---
2	Mounting profile	4	Piece	SPCC cold rolled steel t2.0	Powder coated	---
3	Mounting angle	6	Piece	SPCC cold rolled steel t1.5	Powder coated	4pcs for lower 32U
4	Cable management slot	2	Piece	SPCC cold rolled steel t0.8	Powder coated	---
5	Advanced moon-shaped lock	1	Piece	---	Black	With 2 keys
6	Toughened glass front door	1	Piece	Toughened glass/ t1.2 SPCC	Powder coated	---
7	2 heavy duty castor	4	Piece	---	---	---
8	Frame	2	Piece	SPCC cold rolled steel t1.2	Powder coated	---
9	Side panel	2	Piece	SPCC cold rolled steel t1.2	Powder coatd	---
10	Small round lock	1	Piece	---	Nickel coated	With 2 keys
11	Hexagonal -hole rear door	1	Piece	SPCD cold rolled steel t1.2	Powder coated	Hexagonal vent
12	Bottom panel	1	Piece	SPCC cold rolled steel t1.2	Powder coated	---
13	Spacer	12	Piece	SPCC cold rolled steel t2.0	Powder coated	8pcs for lower 32U
14	M6 B-head screw	20	Piece	Steel	Color Zinc	40pcs for over 32U
15	M6 square nut	20	Piece	Steel	Color Zinc	40pcs for over 32U
16	Allen wrench	1	Piece	Steel	Black	---
17	M12 adjustable Feet	4	Piece	---	---	---

Specification:

Model No.	Capacity (U)	Width (mm)	Depth (mm)	Height (mm)	Packing Dimension W*D*H	Volume (CBM)		
A4.6618. 1	18	600	600	988	670*670*1028	0.4615		
A4.6818. 1			800		670*870*1028	0.5992		
A4.6918. 1			900		670*970*1028	0.6681		
A4.6018. 1			1000		670*1070*1028	0.7370		
A4.6622. 1	22	600	600	1166	670*670*1196	0.5369		
A4.6822. 1			800		670*870*1196	0.6971		
A4.6922. 1			900		670*970*1196	0.7774		
A4.6022. 1			1000		670*1070*1196	0.8574		
A4.6627. 1	27	600	600	1388	670*670*1418	0.6460		
A4.6827. 1			800		670*870*1418	0.8266		
A4.6927. 1			900		670*970*1418	0.9216		
A4.6027. 1			1000		670*1070*1418	1.0166		
A4.6632. 1	32	600	600	1610	670*670*1640	0.7362		
A4.6832. 1			800		670*870*1640	0.9560		
A4.6932. 1			900		670*970*1640	1.0658		
A4.6032. 1			1000		670*1070*1640	1.1757		
A4.6637. 1	37	600	600	1833	670*670*1863	0.8363		
A4.6837. 1			800		670*870*1863	1.0859		
A4.6937. 1			900		670*970*1863	1.2108		
A4.6037. 1			1000		670*1070*1863	1.3356		
A4.6237. 1	42	600	1200	2055	670*1270*1863	1.5852		
A4.6642. 1			600		600	670*670*2085	0.9360	
A4.6842. 1					800	670*870*2085	1.2153	
A4.6942. 1					900	670*970*2085	1.3550	
A4.6042. 1		1000			670*1070*2085	1.4947		
A4.6242. 1		800	1200		670*1270*2085	1.7741		
A4.8642. 1			800		600	870*670*2085	1.2513	
A4.8842. 1					800	870*870*2085	1.5781	
A4.8942. 1					900	870*970*2085	1.7595	
A4.8042. 1		1000			870*1070*2085	1.9409		
A4.8242. 1		47	600		1200	2277	870*1270*2085	2.3037
A4.6647. 1					600		600	670*670*2307
A4.6847. 1	800			670*870*2307			1.3448	
A4.6947. 1	900			670*970*2307			1.4993	
A4.6047. 1	1000		670*1070*2307	1.6539				
A4.6247. 1	800		1200	670*1270*2307	1.9630			
A4.8647. 1			800	600	870*670*2307		1.3448	
A4.8847. 1				800	870*870*2307		1.7462	
A4.8947. 1		900		870*970*2307	1.9469			
A4.8047. 1	1000	870*1070*2307		2.0673				
A4.8247. 1			1200		870*1270*2307	2.5490		

Definition of ornament strip color

A4. . 9
dark blue


Definition of body color

. . 0	. . 1
RAL7035	RAL9004

Color

RAL9004	RAL7035
