

Earthing holes for main parts

Standard:

- Comply with ANSI/EIA RS-310-D IEC297-2 DIN41494; PART1 DIN41494;PART7 ETSI standard;

Feature:

- Hexagonal reticular high-density vented front door (patent) & rear door for protection, ventilation and reliable operation.
- Exquisite image (patent) with precise dimension and craftsmanship.
- Lockable cable entry on top cover and bottom panel with adjustable sizes.
- Optional plinth enables cabinets to stay in a fixed position while meeting requirements of under-base wiring/ventilation and rat prevention.
- Strong cabinet connection by baying kit (patent).
- Spring lock.

Material:

- SPCC cold rolled steel
Thickness: mounting profile 2.0mm mounting angle 1.5mm, others 1.2mm

Surface finish:

- Degreasing, pickling, phosphoric, powder coated


Degree of protection:

- IP20

Loading capacity:

- Static loading: 800KG


Main dimension

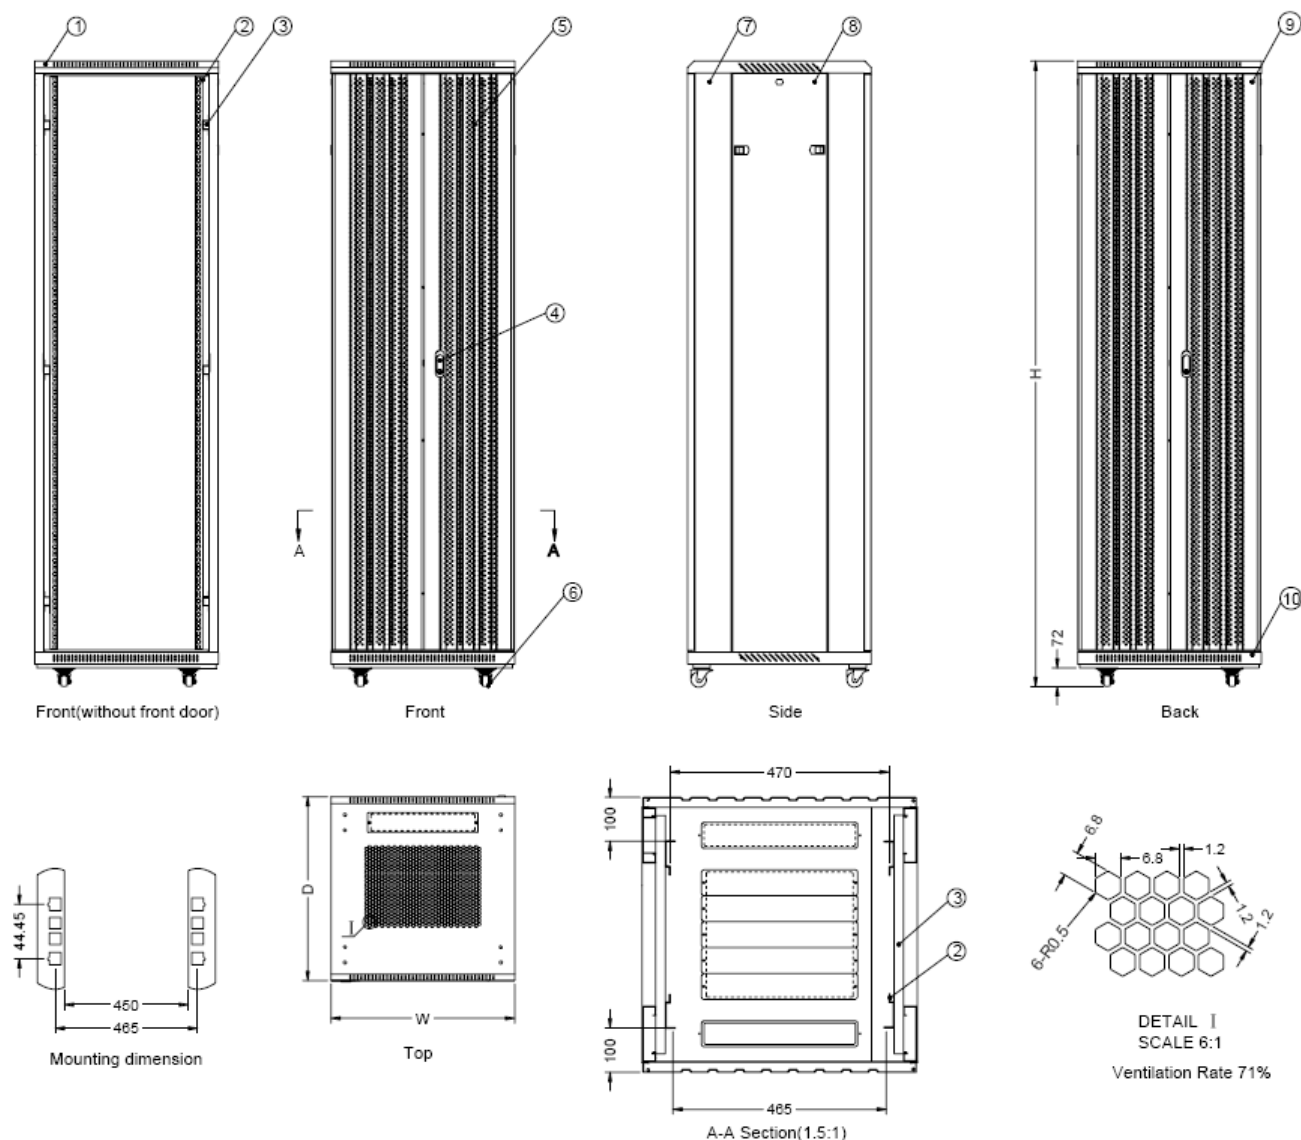

Main parts:

S/N	Specification	Quantity	Unit	Material	Surface finish	Remark
1	Top cover	1	Piece	SPCC cold rolled steel t1.2	Powder coated	---
2	Mounting profile	4	Piece	SPCC cold rolled steel t2.0	Powder coated	---
3	Mounting angle	6	Piece	SPCC cold rolled steel t1.5	Powder coated	4pcs for lower 32U
4	Spring lock	2	Piece	---	Black	With 4 keys
5	Hexagonal reticular high-density vented front door	1	Piece	SPCD cold rolled steel t1.2	Powder coated	---
6	2 heavy duty castor	4	Piece	---	---	---
7	Frame	2	Set	SPCC cold rolled steel t1.2	Powder coatd	---
8	Side panel	2	Piece	SPCC cold rolled steel t1.2	Powder coated	---
9	High-density vented rear door	1	Piece	SPCD cold rolled steel t1.2	Powder coated	---
10	Bottom panel	1	Piece	SPCC cold rolled steel t1.2	Powder coated	---
11	M6 B-head screw	20	Piece	Steel	Color Zinc	40pcs for over 32U
12	M6 square nut	20	Piece	Steel	Color Zinc	40pcs for over 32U
13	Allen wrench	1	Piece	Steel	Black	---
14	M12 adjustable feet	4	Piece	---	---	---

Main dimension

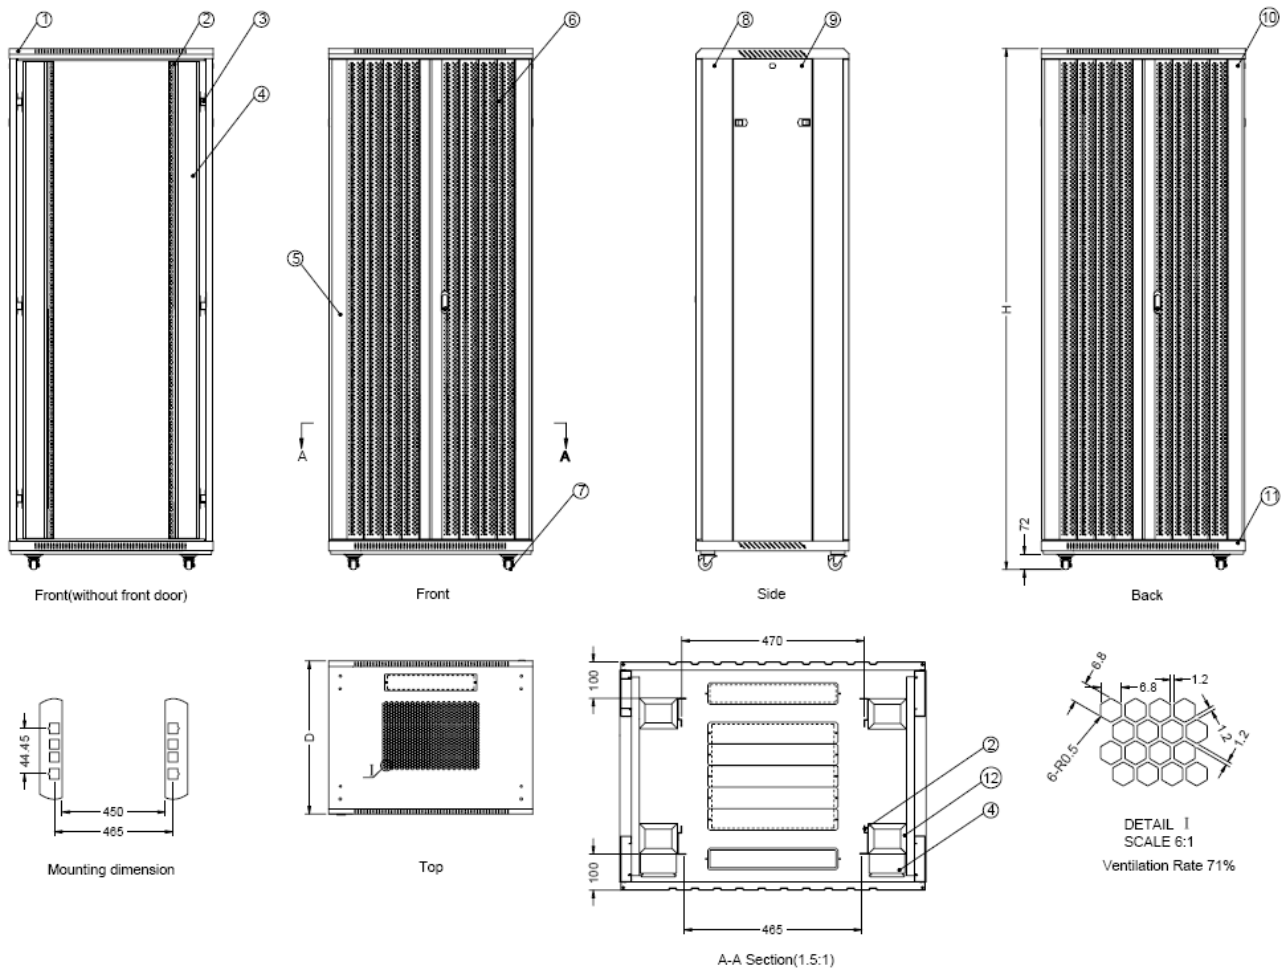

Main parts:

S/N	Specification	Quantity	Unit	Material	Surface finish	Remark
1	Top cover	1	Piece	SPCC cold rolled steel t1.2	Powder coated	---
2	Mounting profile	4	Piece	SPCC cold rolled steel t2.0	Powder coated	---
3	Mounting angle	6	Piece	SPCC cold rolled steel t1.5	Powder coated	4pcs for lower
4	Cable management slot	2	Piece	SPCC cold rolled steel t0.8	Powder coated	---
5	Spring lock	2	Piece	---	Black	With 4 keys
6	Hexagonal reticular high-density vented front door	1	Piece	SPCD cold rolled steel t1.2	Powder coated	---
7	2 heavy duty castor	4	Piece	---	---	---
8	Frame	2	Set	Steel t1.2	Powder coated	---
9	Side door	2	Piece	SPCC cold rolled steel t1.2	Powder coated	---
10	High-density vented rear door	1	Piece	SPCD cold rolled steel t1.2	Powder coated	---
11	Bottom	1	Piece	SPCC cold rolled steel t1.2	Powder coated	---
12	Connecting block	12	Piece	SPCC cold rolled steel t2.0	Powder coated	8pcs for lower 32U
13	M6 B-head screw	20	Piece	Steel	Color Zinc	40pcs for over32U
14	M6 square nut	20	Piece	Steel	Color Zinc	40pcs for over32U
15	Inner 6-angle wrench	1	Piece	Steel	Black	---
16	M12 feet	4	Piece	---	---	---

Specification:

Model No.	Capacity (U)	Width (mm)	Depth (mm)	Height (mm)	Packing Dimension W*D*H	Volume (CBM)
AD.6618.	18	600	600	988	670*670*1028	0.4615
AD.6818.			800		670*870*1028	0.5992
AD.6918.			900		670*970*1028	0.6681
AD.6018.			1000		670*1070*1028	0.7370
AD.6622.	22	600	600	1166	670*670*1196	0.5369
AD.6822.			800		670*870*1196	0.6971
AD.6922.			900		670*970*1196	0.7774
AD.6022.			1000		670*1070*1196	0.8574
AD.6627.	27	600	600	1388	670*670*1418	0.6460
AD.6827.			800		670*870*1418	0.8266
AD.6927.			900		670*970*1418	0.9216
AD.6027.			1000		670*1070*1418	1.0166
AD.6632.	32	600	600	1610	670*670*1640	0.7362
AD.6832.			800		670*870*1640	0.9560
AD.6932.			900		670*970*1640	1.0658
AD.6032.			1000		670*1070*1640	1.1757
AD.6637.	37	600	600	1833	670*670*1863	0.8363
AD.6837.			800		670*870*1863	1.0859
AD.6937.			900		670*970*1863	1.2108
AD.6037.			1000		670*1070*1863	1.3356
AD.6237.	42	600	1200	2055	670*1270*1863	1.5852
AD.6642.			600		670*670*2085	0.9360
AD.6842.			800		670*870*2085	1.2153
AD.6942.			900		670*970*2085	1.3550
AD.6042.		1000	670*1070*2085		1.4947	
AD.6242.		1200	670*1270*2085		1.7741	
AD.8642.		800	600		870*670*2085	1.2513
AD.8842.			800		870*870*2085	1.5781
AD.8942.			900		870*970*2085	1.7595
AD.8042.			1000		870*1070*2085	1.9409
AD.8242.		1200	870*1270*2085		2.3037	
AD.6647.		47	600		600	2277
AD.6847.	800			670*870*2307	1.3448	
AD.6947.	900			670*970*2307	1.4993	
AD.6047.	1000			670*1070*2307	1.6539	
AD.6247.	1200		670*1270*2307	1.9630		
AD.8647.	800		600	870*670*2307	1.3448	
AD.8847.			800	870*870*2307	1.7462	
AD.8947.			900	870*970*2307	1.9469	
AD.8047.			1000	870*1070*2307	2.0673	
AD.8247.	1200		870*1270*2307	2.5490		

Definition of body color:

0	1
RAL7035	RAL9004

Color:

RAL9004	RAL7035
