



E2000 Fiber Optic Patch Cord & Fiber Optic Converter

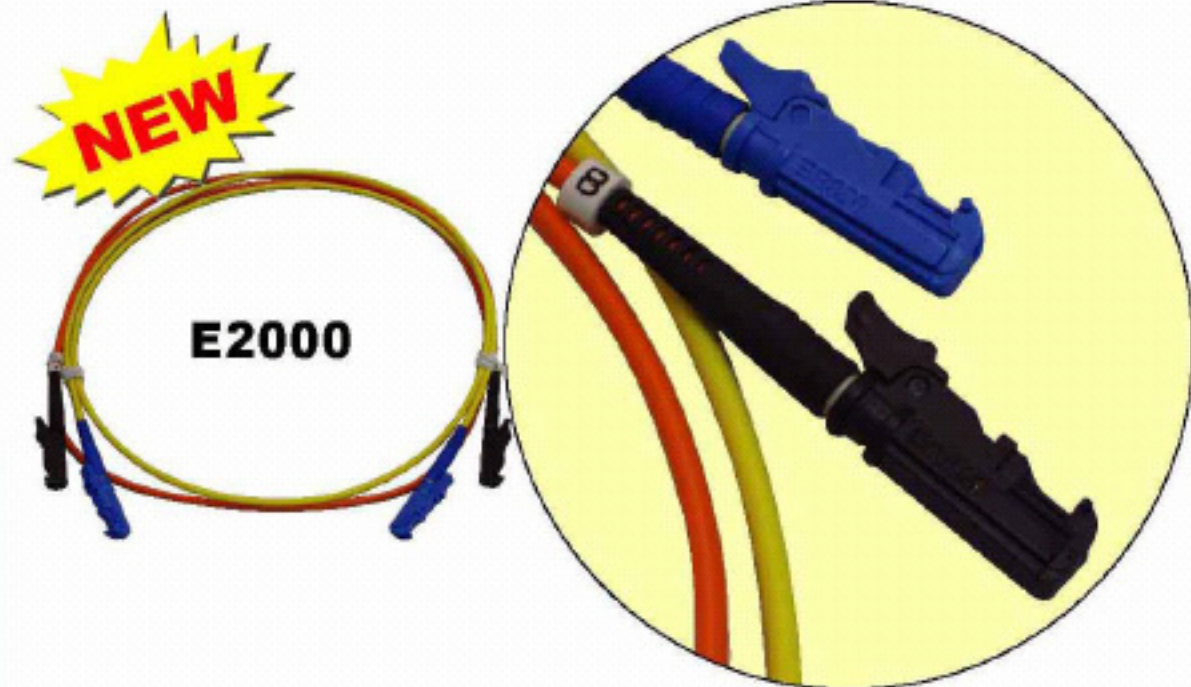

Feature


- Making Adaptors Spring-loaded Shutter
- Positive Latching Mechanism with Interchangeable Color-Coded Thumb-Latch
- LOW Loss
 - Multimode PC Patch cord (IL < 0.3dB)
 - Single Mode SPC Patch cord (IL < 0.4dB; RL > 40dB)
 - Single Mode UPC Patch cord (IL < 0.4dB; RL > 50dB)
 - Single Mode APC Patch cord (IL < 0.4dB; RL > 60dB)

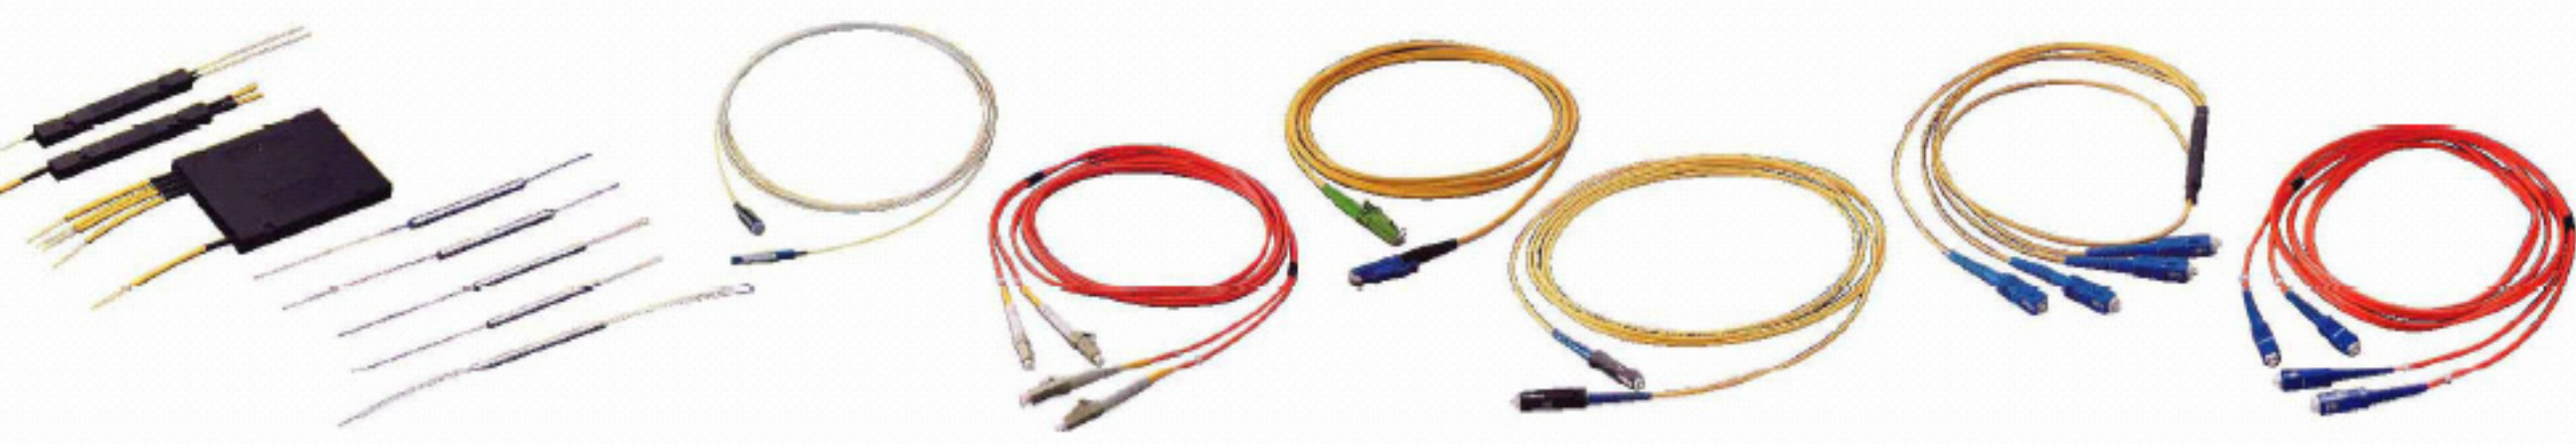

Fiber Media Converter



1000 Base

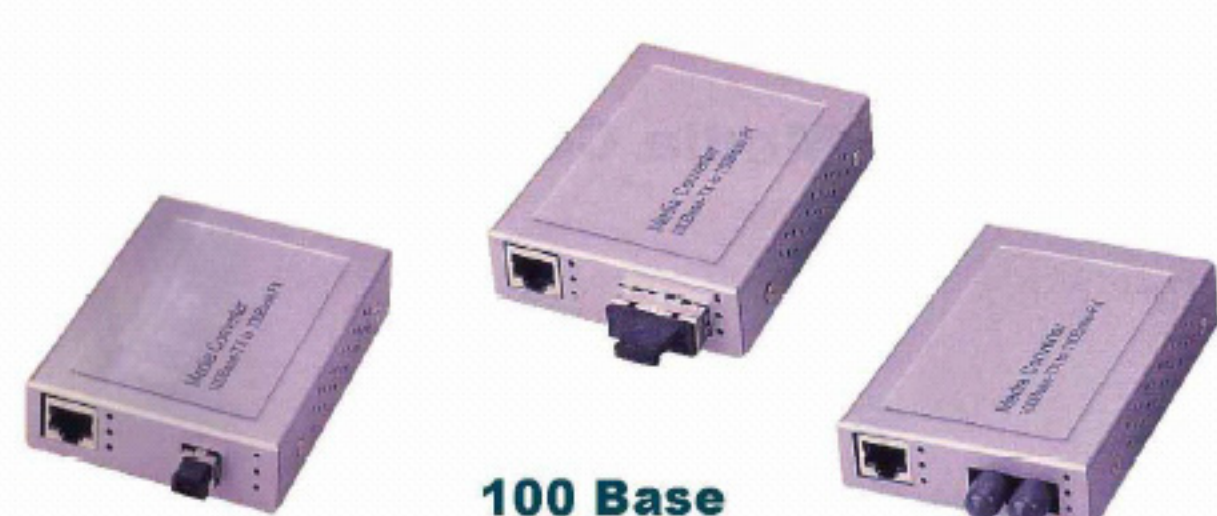

100 Base

Specification & Features

- | | |
|---------------------|---|
| AKEC-212C | 1000Base-T to SX(SC,MMF,220m or 550m) |
| AKEC-212L | 1000Base-T to SX(LC,MMF,220m or 550m) |
| AKEC-212GM | 1000Base-T to SX / CX(GBIC,MMF,220m or 550m) |
| AKEC-212GS10 | 1000Base-T to LX / CX(GBIC,SMF,10km) |
| AKEC-212GS20 | 1000Base-T to LX / CX(GBIC,SMF,20km) |
| AKEC-212PM | 1000Base-T to SX(Pluggable LC,MMF,220m or 550m) |
| AKEC-212PS | 1000Base-T to LX(Pluggable LC,SMF,10km) |
| AKEC-212C10 | 1000Base-T to LX(SC,SMF,10km) |
| AKEC-212L20 | 1000Base-T to LX(LC,SMF,20km) |
- ◆ Support Tu IEEE802.3 10BASE-T/IEEE802.3u100BASE-TX
 - ◆ Fast Ethernet TP Fiber
 - ◆ Power consumption: 1.5Watts (max)
 - ◆ Weight: 0.25kg
 - ◆ Certificates: CE & FCC-B

Specification & Features

- | | |
|--------------------|---------------------------------|
| AKEC-202C | 100Base-TX to FX(SC,MMF,2km) |
| AKEC-202T | 100Base-TX to FX(ST,MMF,2km) |
| AKEC-202M | 100Base-TX to FX(MT-RJ,MMF,2km) |
| AKEC-202C15 | 100Base-TX to FX(SC,SMF,15km) |
| AKEC-202L15 | 100Base-TX to FX(LC,SMF,15km) |
| AKEC-202C20 | 100Base-TX to FX(SC,SMF,20km) |
| AKEC-202L20 | 100Base-TX to FX(LC,SMF,20km) |
| AKEC-202C40 | 100Base-TX to FX(SC,SMF,40km) |
| AKEC-202L40 | 100Base-TX to FX(LC,SMF,40km) |
| AKEC-202C60 | 100Base-TX to FX(SC,SMF,60km) |
| AKEC-202L60 | 100Base-TX to FX(LC,SMF,60km) |
- ◆ Support Tu IEEE802.3 10BASE-T/IEEE802.3u100BASE-TX
 - ◆ Fast Ethernet TP Fiber
 - ◆ Power consumption: 1.5Watts (max)
 - ◆ Weight: 0.25kg
 - ◆ Certificates: CE & FCC-B