

Fiber Optic Tool & Waterproof Crimping Tools

BHT-C151>> 5.8" (147mm)

Serrated Sharp
Teeth




Ergonomic Scissors for Cutting Kevlar

- Made of Alloy steel and hardened, with chromed plating finished.

BHT-	DESCRIPTION
C151	FOR CUTTING KEVLAR OF FIBER OPTIC CABLE

BHT-H510B>> 7.7" (195mm)

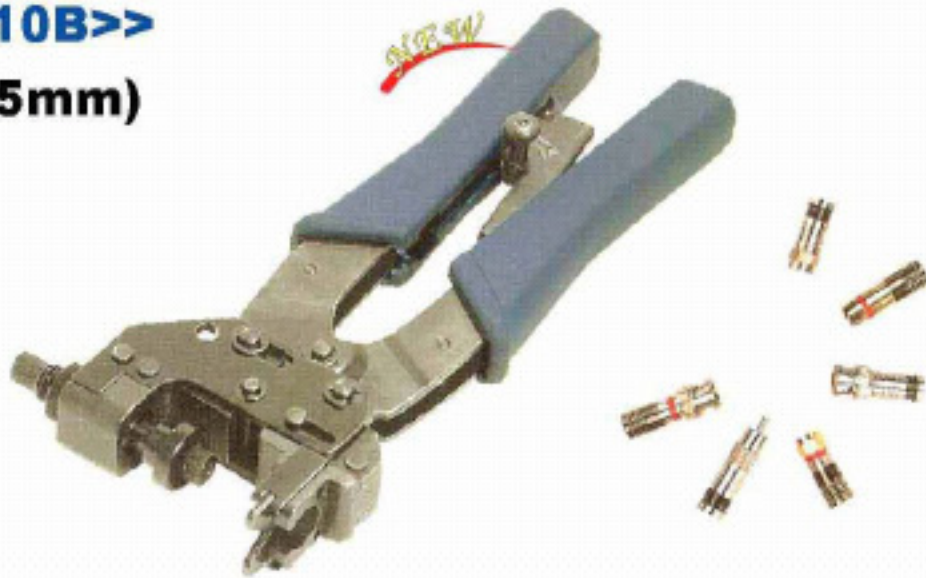

BHT-	DESCRIPTION
H510B	For F, BNC & RCA compression connectors. With adjustment for crimping different length of connectors.

BHT-H510>> 7.7" (195mm)




- Works on Augat/T&B Snap-N-Seal™ Connectors, Paladin SealTite Connectors, AIM CATV F waterproof connectors.

BHT-	DESCRIPTION
H510	With adjustment for crimping different length of F compression connectors.

- Use BHT-332 (2-Blades) or BHT-322 (3-Blades) for stripping cable.
- Use BHT-206 for cutting cables.

BHT-508 Series>> 8.5" (216mm)

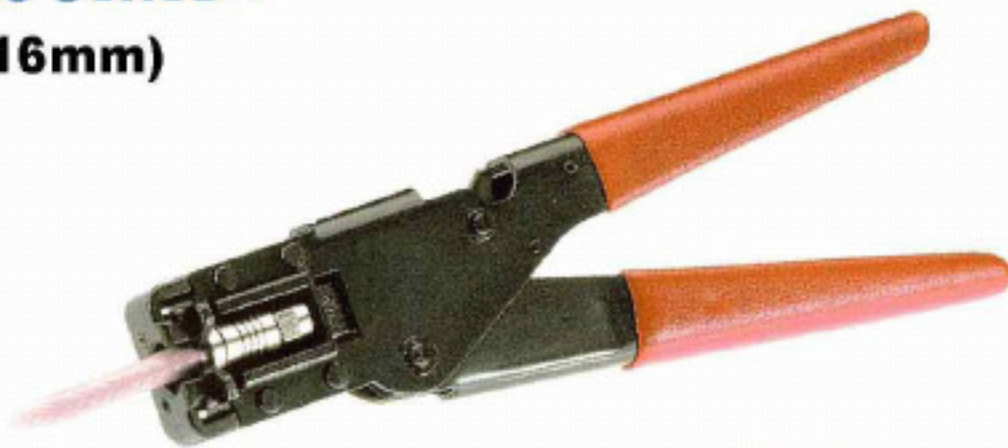

Before Crimp 

After Crimp 

- Works on Augat/T&B Snap-N-Seal™ Connectors, Paladin SealTite Connectors, and AIM CATV F waterproof connectors.

BHT-	FOR CRIMPING F CONNECTOR	COMPRESSED DISTANCE
508	RG-59(4C), RG-6(5C)	20.30 ± 0.15
508-193	RG-59(4C), RG-6(5C)	19.30 ± 0.15
508-197	RG-59(4C), RG-6(5C)	19.70 ± 0.15
508-207	RG-59(4C), RG-6(5C)	20.70 ± 0.15
508N	RG-59(4C), RG-6(5C) Non-Ratchey Type	20.30 ± 0.15
508BNC	RG-59(4C), RG-6 BNC WATERPROOF CONNECTORS	20.30 ± 0.15

- Use BHT-332 (2-Blades) or BHT-322 (3-Blades) for stripping cable.
- Use BHT-206 for cutting cables.

BHT-H518A>> 5.6" (143 ± 1mm)



- With a handle lock

BHT-	FOR CRIMPING F CONNECTOR	COMPRESSED DISTANCE
H518A	RG-59(4C), RG-6(5C)	20.30 ± 0.15
H518A1		19.30 ± 0.15
H518A2		19.70 ± 0.15
H518A3		20.70 ± 0.15
H518A4		21.00 ± 0.15

Waterproof Connectors Crimping Tools & Cable Stripper

BDL-8071R

PROFESSIONAL WATERPROOF CONNECTORS CRIMPING TOOL




Adjustable(25~35)
"F" CONNECTORS
RG-11 (7C)

Specification:

FUNCTION : FOR WATERPROOF CONNECTORS CRIMPING TOOL "F" CONNECTORS RG-11(7C)

LENGTH : 9.1" (231±3mm)

WEIGHT : 0.45 KGS

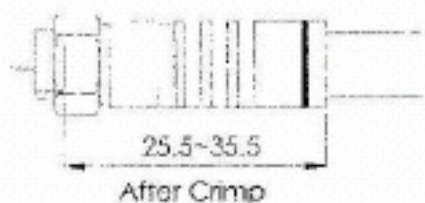

BDL-8073RC

PROFESSIONAL WATERPROOF CONNECTORS CRIMPING TOOL
(Interchangeable & Adjustable)




Adjustable Max. 10mm
Interchangeable "F" (BNC,RCA)

Specification:

FUNCTION : FOR WATERPROOF CONNECTORS CRIMPING TOOL "F" /BNC/RCA RG-58/59/62/6 (3C/4C/5C)


LENGTH : 9.1" (231±3mm)

WEIGHT : 0.48 KGS

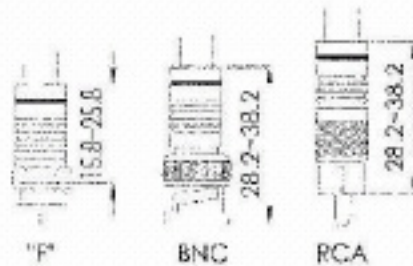

BDL-807R

PROFESSIONAL WATERPROOF CONNECTORS CRIMPING TOOL(Guiding Type)

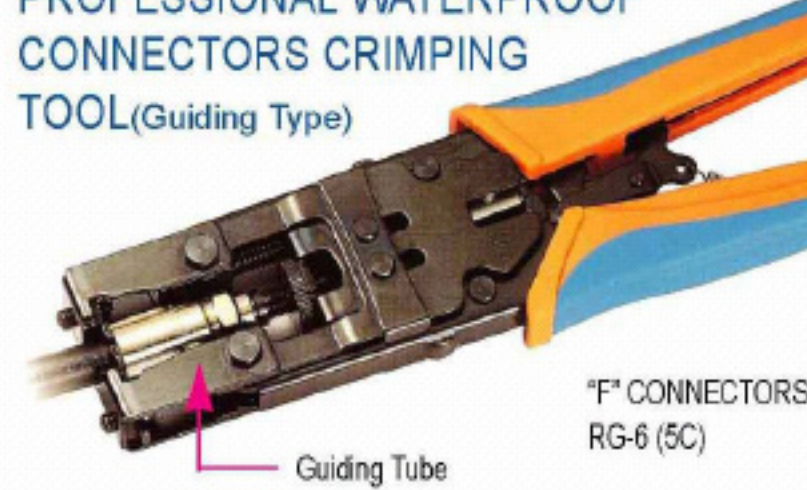


Guiding Tube
"F" CONNECTORS
RG-6 (5C)

Specification:

ITEM : BDL-807R1: RG-6(5C) / D:19.3mm
BDL-807R2: RG-6(5C) / D:19.7mm
BDL-807R3: RG-6(5C) / D:20.3mm
BDL-807R4: RG-6(5C) / D:20.7mm

FUNCTION : FOR WATERPROOF CONNECTORS CRIMPING TOOL

LENGTH : 8.6" (218±3mm)
WEIGHT : 0.46 KGS



BDL-7500 SERIES CABLE STRIPPER

UTP/STP CABLE AND FLAT CABLE STRIPPER & CUTTER



Specification:

BDL-	DESCRIPTION
7500A	UTP/STP CABLE STRIPPER (φ 2.6~φ 8.0)
7500B	UTP/STP, FLAT CABLE STRIPPER & CUTTER

LENGTH : 5" (127mm)

MT'L : ABS

BDL-7501A CABLE STRIPPER

COAX. CABLE STRIPPER AND FLAT CABLE STRIPPER/CUTTER




Specification:

COAX. CABLE STRIPPER
RG-174/58/59/62/6
3C/4C/5C(φ 2.6~φ 8.0)


LENGTH : 5" (127mm)

MT'L : ABS

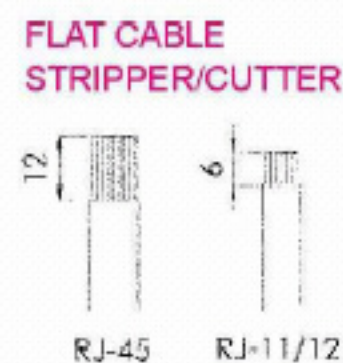

BDL-7502 SERIES

COAX. CABLE STRIPPER

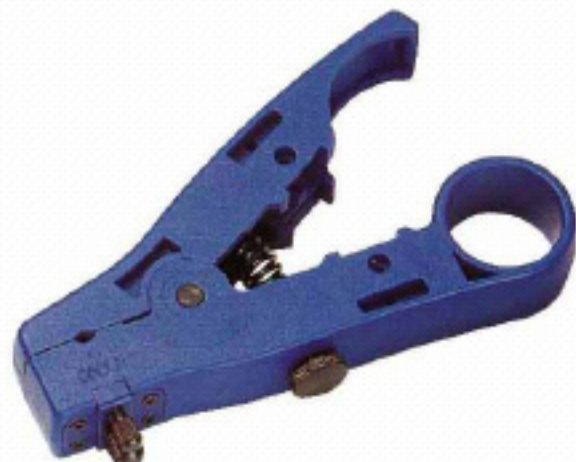

Specification:

BDL-	STRIPPER DIMENSION "D"	STRIPPER DISTANCE
7502A	6.4mm	 2-Blades Model RG-174/58/59/62/6 3C/4C/5C(φ 2.6~φ 8.0)
7502B	4.0mm	
7502C	6.0mm	
7502D	8.0mm	
7502E	12.0mm	

BDL-7503 SERIES

COAX. CABLE STRIPPER



Specification:

BDL-	STRIPPER DIMENSION "D"		STRIPPER DISTANCE
	D(mm)	E(mm)	
7503A	8.0mm	4.0mm	 3-Blades Model RG-174/58/59/62/6 3C/4C/5C(φ 2.6~φ 8.0)
7503B	6.0mm	6.0mm	
7503C	4.0mm	8.0mm	

Professional Crimping Tool-Ratchet Type

**BHT-336FM (Frame Only)>>
8.7" (220mm)**

Die sets are interchangeable,
except BHT-311M, BHT-301X
and BHT-301



OEM/CUSTOMER DESIGNS ARE WELCOME



	COMPLETE TOOL	HEX SIZE	DESCRIPTION		COMPLETE TOOL	HEX SIZE	DESCRIPTION
	BHT-336FM	—	Frame Only		BHT-336FM	—	Frame Only
	BHT-336A	.256" .068" .213" (6.50/1.72/5.41mm)	RG 58, 59, 62		BHT-336H1 OLD ITEM NO.BHT-236H1	.255" .320" .350" (6.48/8.13/8.90mm)	CATV F Connectors RG 59, 6
	BHT-336A4 OLD ITEM NO.BHT-236A	.255" .187" .068" .213" (6.48/4.75/1.72/5.41mm)	RG 58, 59, 62, 174		BHT-336I OLD ITEM NO.BHT-236I	.255" .213" .093" .068" .315" (6.48/5.40/2.36/1.72/8.0mm)	RG 58, 59, 6, 174
	BHT-336C	.256" .319" .068" .213" (6.50/8.10/1.72/5.41mm)	RG 58, 59, 62, 6		BHT-336J	.042" .068" .078" .128" .151" .178" (1.07/1.72/1.98/3.25/3.84/4.52mm)	RG 174, 179 Belden 8218 Fiber Optic
	BHT-336C1	.068" .216" .324" .360" (1.72/5.49/8.23/9.14mm)	F-59, 62, 6		BHT-336K	.100" .128" .429" (2.54/3.25/10.90mm)	RG 8, 11, 174 179, 213
	BHT-336C2	.068" .262" .324" .360" (1.72/6.65/8.23/9.14mm)	CATV "F" Connectors RG59, 6		BHT-336K3	.256" .068" .295" (6.50/1.72/7.49mm)	RG 59, 6,
	BHT-336D	.213" .256" .068" .324" (5.41/6.50/1.72/8.23mm)	RG 58, 59, 62, 6		BHT-336K4	.100" .128" .190" .213" (1.07/1.72/4.83/5.41mm)	RG-58,174
	BHT-336D1	.068" .178" .324" (1.72/4.52/8.23mm)	RG-174,6		BHT-336K5	.080" .100" .429" (2.03/2.54/10.90mm)	RG-11,174
	BHT-336D2	.256" .429" .068" .213" (6.50/10.89/1.72/5.41mm)	RG-58,59,62, 11,8,213		BHT-336M	.228" .068" .305" (5.79/1.72/7.75mm)	RG-58, 59, 62
	BHT-336F1	.042" .068" .133" .162" .195" (1.07/1.72/3.38/4.11/4.95mm)	Fiber Optic SMA (Oval Type)		BHT-336P1 OLD ITEM NO.BHT-236PA	.255" .213" .100" .068" .324" (6.48/5.41/2.50/1.72/8.23mm)	RG 58, 59, 62, 6
	BHT-336F2	.042" .068" .151" .178" .213" (1.07/1.72/3.84/4.25/5.41mm)	Fiber Optic SMA SMB Connectors RG 58,174,Belden8281		BHT-336V	.043" .069" .100" .128" .151" .213" (1.09/1.75/2.54/3.25/4.1mm)	SMA, SMB SMC,MCX
	BHT-336F3	.151" .178" .213" (3.84/4.52/5.41mm)	RG-174, 58		BHT-336V1	.047" .068" .178" .217" .256" .324" (1.19/1.73/4.52/5.51/6.50/8.23mm)	RG-59, 62, 6, 174
	BHT-336G	.043" .068" .100" .137" .213" .255" (1.09/1.72/2.54/3.48/5.41/6.48mm)	RG 58, 59, 62, 174 Fiber Optic		BHT-336Y1	.069" .218" (1.75/5.54mm)	RG-58 (Oval Type)
	BHT-336G1	.042" .068" .190" .213" (1.07/1.72/4.83/5.41mm)	RG-58				